



Honesty, Cooperation, Innovation



Everlasting Quality


Henli Industrial Co.,Ltd
Xinhaofang Building No.188 Shennan Road
Shenzhen China.

Tel: 86-755-86182128

Fax: 86-755-86182889

Email: sales@henlisteel.com

Website: www.henlisteel.com

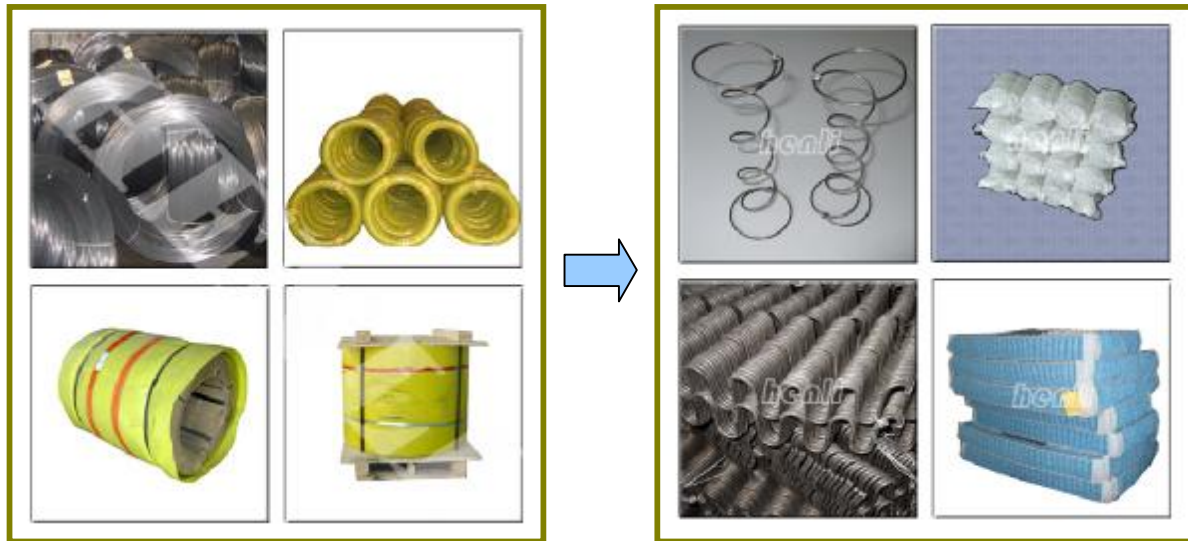

Names of item

✚ *Patented steel wire for mattress*

Material used


✚ Home made and imported high quality steel wire rod(C-0.45-0.80%)

Specification

- ✚ Dimension: 0.7mm-5.0mm steel wire available, 1.0-1.5mm steel wire for helical steel wire; 0.7-2.5mm steel wire for pocket spring or bonnell spring; 1.5-4.0mm steel wire for zig zag spring
- ✚ Surface: bright smooth surface with black color, rust-resistant
- ✚ Standard: GB/T 4357, ASTM A 227, DIN17223, EN10270 etc.
- ✚ Application: showed as the pictures above
- ✚ Characteristics: Lead Quenching Treated, Reliable Performance, Good Fatigue-Resistance, and Standard Packing, and Well Performing through High-Speed Automatic Production Machines.

Packing

- ✚ Coils – steel wires are winded into coil shape, strapped with steel strip, outside covered with the PVC paper, 80-300kg/coil
- ✚ Z2 packing – standard Z2 packing, 400-500kg/coil
- ✚ Cardboard coils – inside with paper cardboard, steel wire are strapped with steel strip and iron hook. Outside covered with PE paper, 400-900kg/coil
- ✚ Steel frame – steel wires are placed with the steel frame and strapped with steel strips, 600-1000kg/carrier

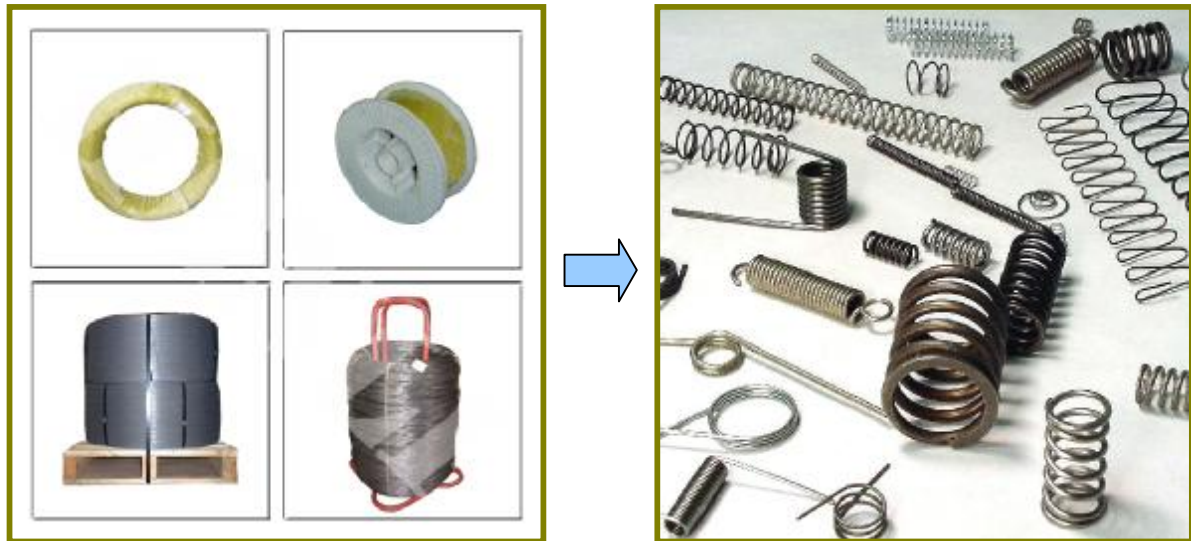

Names of item

✚ *Steel wire for mechanical spring*

Material used


✚ Home made and imported high quality steel wire rod 70, 72A, 72B, 80, 82B, 50CrVA, 55CrSiA, 60Si2MnA, 67CrVA, 65Mn, 67B

Specification

- ✚ **Dimension: 0.15- 20.0mm available**
- ✚ **Surface: bright smooth surface with black color, phosphorized or Zinc-Coated , excellent performance in rust resistance**
- ✚ **Standard: GB/T 4357, ASTM A 229, DIN17223, EN10270 etc**
- ✚ **Application: showed as the pictures above**
- ✚ **Characteristics: Made from High-Quality Raw Material, Oil or Lead Quenching Treated, High Tensile, Good Performance, Various International Standard Packing.**

Packing

- ✚ **Coils - steel wires are winded into coil shape, strapped with steel strip, outside covered with the PVC paper, 20-500kg/coil**
- ✚ **Spool - according DIN300 or 355, 15-30kg/spool**
- ✚ **Z2 packing - standard Z2 packing, 350-450/coil**
- ✚ **Steel frame - steel wires are placed around the steel frame and strapped with steel strips, 600-900kg/carrier**

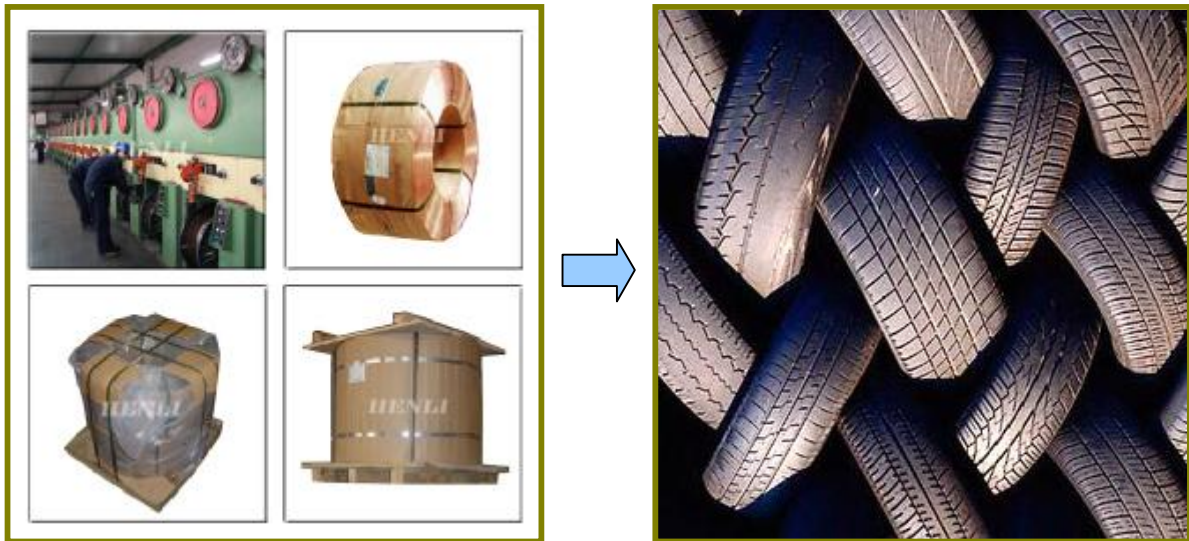

Names of item

✚ *Bead wire(tempered tyre wire)*

Material used

✚ Home made high quality steel rod specially for bead wire (72A -77A)

Specification

- ✚ Dimension: 0.78- 2.1mm available
- ✚ Surface: copper coated, phosphorized coatings
- ✚ Tensile strength: 1500-2500N/mm², or other as per customers requirement
- ✚ Application: for making tyre
- ✚ Characteristics: **Manufactured by Equipments of Italian Origin, Rust-Resistant Vacuum Sealed Packing, Excellent Quality.**

Packing (showed as above)

- ✚ Z2 packing – standard Z2 packing, using wooden pallet fastened with steel core, which would be perfect for exporting, weight 380-450kg/coil,two coil in one



Names of item

✚ *Brushes wire*

Material used


✚ Home made and imported high quality steel wire rod(C: 0.5-0.6%)

Specification

- ✚ Dimension: 1.0- 4.0mm available
- ✚ Surface: Bright, Zinc-Coated, Bronze-Coated
- ✚ Tensile strength: 1300-1500N/mm², or other as per customers requirement
- ✚ Application: for making steel brush
- ✚ Characteristics: Advance-Processed, Good Performance, Standard Packing, Good Zinc-Coating.

Packing (showed as above)

- ✚ Coils – steel wires are wound into coil shape, strapped with steel strip, outside covered with the PVC paper, weight:100-250kg/coil
- ✚ Z2 packing – standard Z2 packing, using wooden pallet fastened with steel core, which would be perfect for exporting, weight:400-500kg/coil

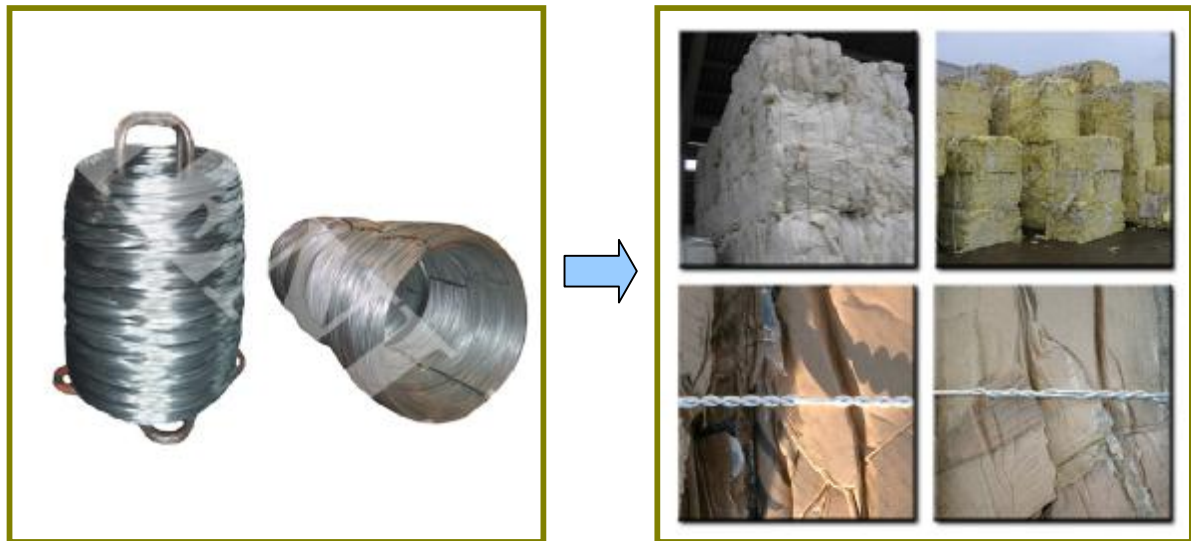

Names of item

✚ *Electric galvanized baling steel wire*

Material used


✚ Home made and imported high quality steel wire rod (C:0.6-0.8)

Specification

- ✚ Dimension: 2.0- 4.0mm available
- ✚ Surface: bright surface with zinc coatings, strong rust resistance
- ✚ Tensile strength: 900-1200Mpa, or other as per customers requirement
- ✚ Elongation: 7%-10%, zinc coatings: 40-100g/m²
- ✚ Application: for using in binding the waste paper and other stuff
- ✚ Standard: ASTM 461
- ✚ Characteristics: Good Zinc-Coating, Smooth Surface, High Ratio of Elongation, Special Protective Packing.

Packing (showed as above)

- ✚ Steel frame – steel wires are placed around the steel frame and strapped with steel strips, weight:600-800kg/carrier

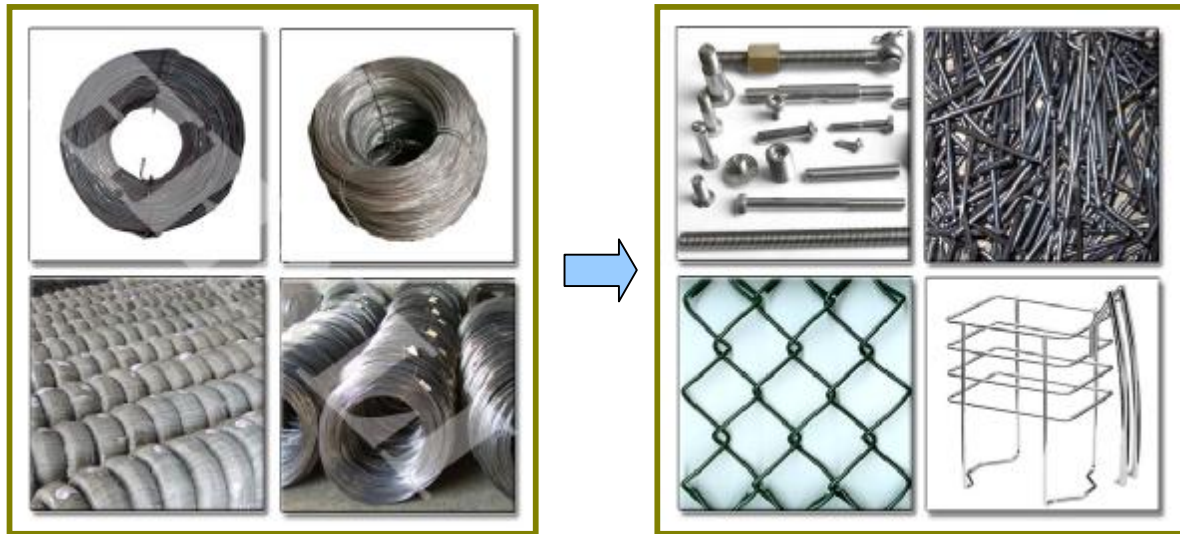

Names of item

✚ *Low carbon steel wire*

Material used

✚ Home made and imported high quality wire rod SAE1005-1022.

Specification

- ✚ Dimension: 2.0- 20.0mm available
- ✚ Surface: bright surface with zinc coatings, strong rust resistance
- ✚ Tensile strength: 600-1000Mpa, or other as per customers requirement
- ✚ Application: Kitchen Appliances, Washing Room Appliances, Standard Components, Constructive Binding and Fencing, etc.
- ✚ Characteristics: Good Zinc-Coating, Smooth Surface, High Ratio of Elongation, Specially Protective Packing.

Packing (showed as above)

- ✚ Coils – steel wires are winded into coil shape, strapped with steel strip, outside covered with the PVC paper, weight:50-250kg/coil
- ✚ Steel frame – steel wires are placed around the steel frame and strapped with steel strips,weight:600-800kg/carrier



Names of item

✚ *CO₂ Welding wire*

Material used

✚ Home made or imported high quality wire rod (C:0.006-0.15)

Specification

- ✚ Dimension: 0.8-1.6mm available
- ✚ Surface: Flat and Smooth
- ✚ Tensile strength: $\geq 400-500\text{Mpa}$,
- ✚ Application: Welding Low-Carbon Steel and Alloy Steel of Cars, Ships, Bridges, Containers, and Building Machines, etc.
- ✚ Standard: GB/T8110-1995(ER50-6,ER49-1)
- ✚ Characteristics: Stable Pay-Off during Welding, Beautiful Welding Gap, Little Splash, Good Technology and Reliable Performance.

Packing (showed as above)

✚ Spool –plastics spool weight:15-18kg/spool