



Everlasting Quality


Henli Industrial Co.,Ltd
Xinhaofang Building No.188 Shennan Road
Shenzhen China.

Tel: 86-755-86182128

Fax: 86-755-86182889

Email: sales@henlisteel.com

Website: www.henlisteel.com

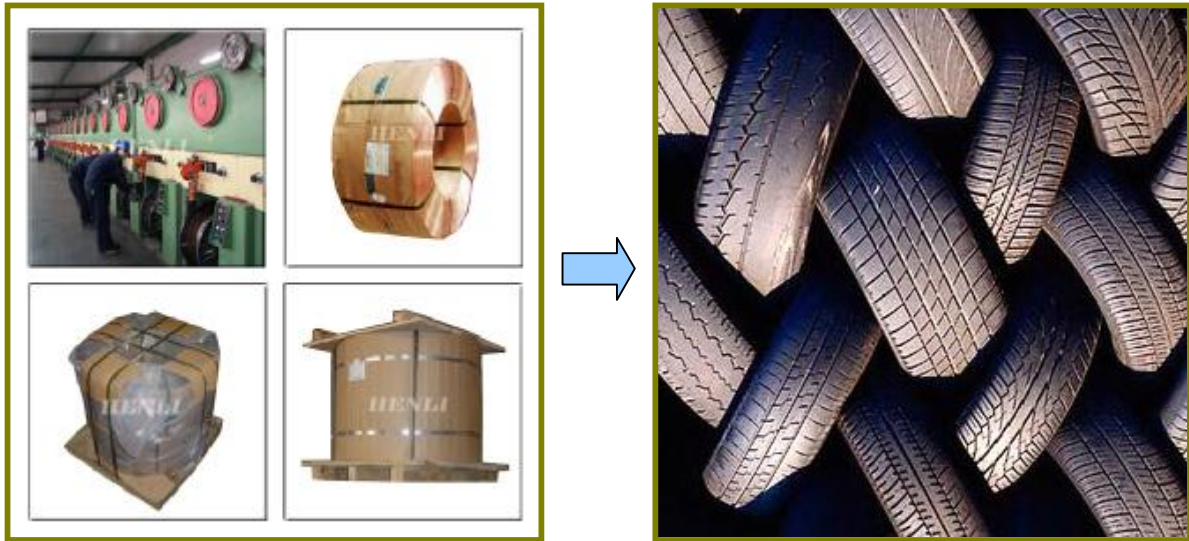

Names of item

✚ *Bead wire(tempered tyre wire)*

Material used

✚ Home made high quality steel rod specially for bead wire (72A -77A)

Specification

- ✚ Dimension: 0.78- 2.1mm available
- ✚ Surface: copper coated, phosphorized coatings
- ✚ Tensile strength: 1500-2500N/mm², or other as per customers requirement
- ✚ Application: for making high quality tyre
- ✚ Standard: GB14450 or BEKAERT
- ✚ Characteristics: Manufactured by Equipments of Italian Origin, Rust-Resistant Vacuum Sealed Packing, Excellent Quality.

Packing (showed as above)

- ✚ Z2 packing – standard Z2 packing, using wooden pallet fastened with steel core, which would be perfect for exporting, weight 380-450kg/coil,two coil in one

CERTIFICATE OF ANALYSIS

This is to certify that the following bead wire has been duly inspected by us and found conforming to the specification: **GB/T14450-2004**

Certificate No.: HLST070709

Date: Jul. 9th, 2007

Customer Order Ref.: SAMPLE

Manufacturer: **Henli Industrial Co., Ltd.**

Date of test: Jul. 5th, 2007

SPECIFICATION

	Standard	Actual
Nominal Diameter of Wire (mm) :	0.96+/-0.02	0.97
Tensile Strength (MPa) :	≥1900	1965
No. of Twists (200D) :	≥50	56
Elongation (L ₀ =200mm, %) :	≥5.0	6.4
Straightness (mm/3m) :	≤600	290
Weight Coating of Cu (g/kg) :	0.60~1.18	0.79
Amounting Coating g/kg Percents		
C.U. % :	>97.0	98.7
S.N. % :	<3.0	1.25
Adhesion (N/50mm) :	—	938
Length of Wire (kg) :	—	1.0

Dr. Pan Heming
Q.C Director