



***Everlasting Quality***


**Henli Industrial Co.,Ltd**  
**Xinhaofang Building No.188 Shennan Road**  
**Shenzhen China.**

**Tel: 86-755-86182128**

**Fax: 86-755-86182889**

**Email: [sales@henlisteel.com](mailto:sales@henlisteel.com)**

**Website: [www.henlisteel.com](http://www.henlisteel.com)**

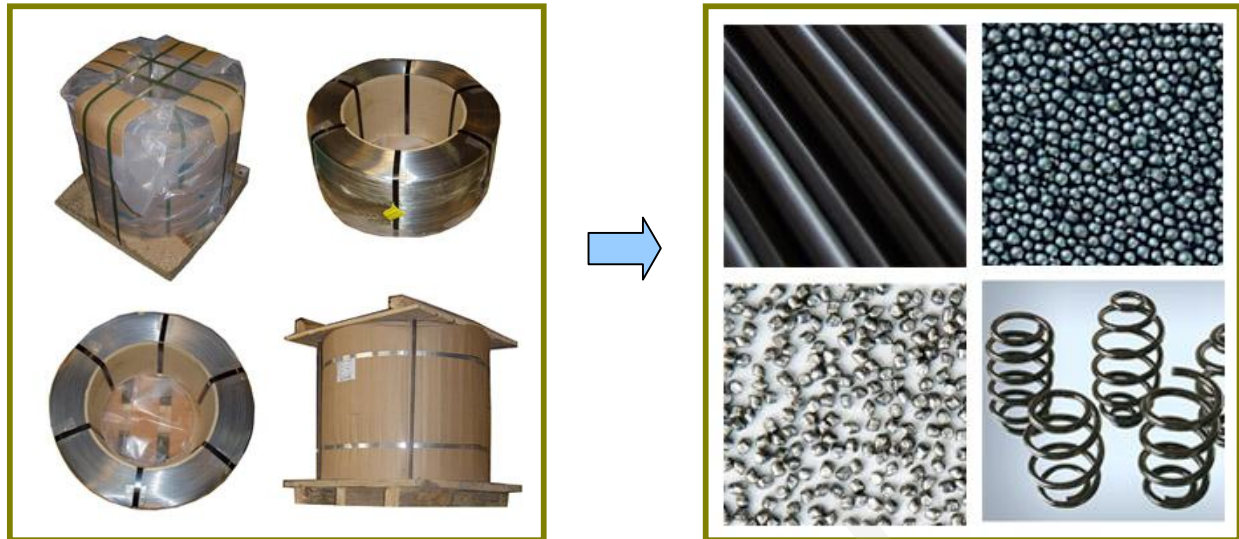

**Names of item**

**✚ Steel Shot Wire**


**Commodity & Specifications:**

Carbon Steel Wire

- Treatment: patented, drawn, without heat treatment.
- Diameter: 0.83mm
- Tolerance: +0.020/-0.010mm
- Carbon content: 0.79~0.82%
- Tensile strength: 2160~2360N/mm<sup>2</sup>,  
corresponds to a wire hardness of HV 570~630
- Surface: bright, dry drawn, no damages like scratches or corrosion, no lubrication.
- Helix: Min. 500mm, distance of both ends max. 30mm
- Winding: no knots, bents or ends.
- Packing: in coils Z2, around 400kg each, with paper collar.

## Packing

- ✚ Z2 packing – standard Z2 packing, using wooden pallet fastened with steel core, which would be perfect for exporting, weight:400-500kg/coil

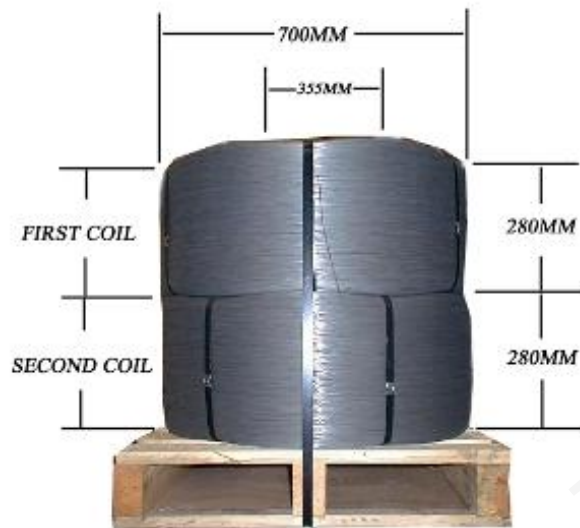

ONE COIL WEIGHT: 450-500KG  
BOTH COILS IN THE WOODEN PALLET

Henli Z2 packing is perfect to pack:

- 1) Bright steel wire 0.6 - 2.0mm
- 2) Bead wire 0.78-2.1mm
- 3) Galvanized steel wire 0.6 - 2.0mm

Characteristics: International standard Z2 packing;  
steel wires are tightly winded;  
good for the high speed machine;  
covered with vacuum PVC packing;  
fumigated wooden pallet protecting wires all the way.

## Loading

